


# 20K Gate Valve

20SLB

B.B.I.S.

RF-flanged

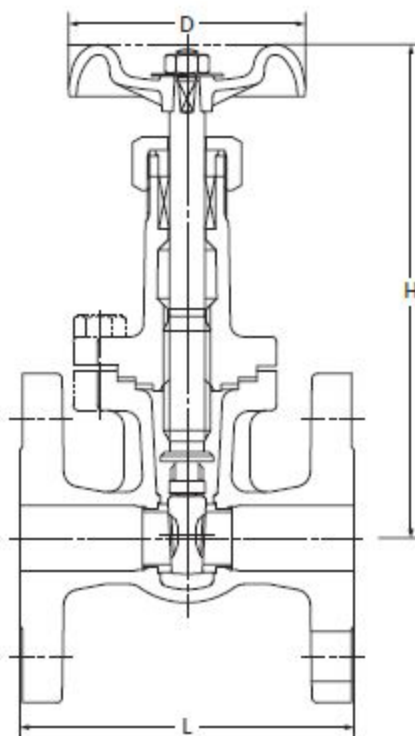

F-F dimension : JIS B 2002 JV 4-4

End flanges : JIS B 2239 20K

120°C Static water..... 2.75MPa  
 220°C Steam, air, gas, oil..... 2.45MPa  
 300°C Steam, air, gas, oil..... 2.26MPa  
 350°C Steam, air, gas, oil..... 1.96MPa

●Use for lubricating or hydraulic oil is acceptable.

## Materials

Parts	JIS material
Body	FCD-S
Bonnet	FCD-S
Stem	SUS 420J2
Disc	SCS 1
Body seat ring	SUS 403
Gland	SUS 403
Gland packing	Asbestos-free
Handwheel	FCD 450-10
Wheel nut	SS 400
Bonnet bolt	S45C
Gasket	Asbestos-free
Name plate	A1050P

## Dimensions

mm

Size	mm	15	20	25	32	40
	inch	1/2	3/4	1	1 1/4	1 1/2
L		108	117	127	140	165
H (open)		175	177	214	241	277
D		90	90	100	115	135

NOTE : For flange dimensions refer to Page 40.